
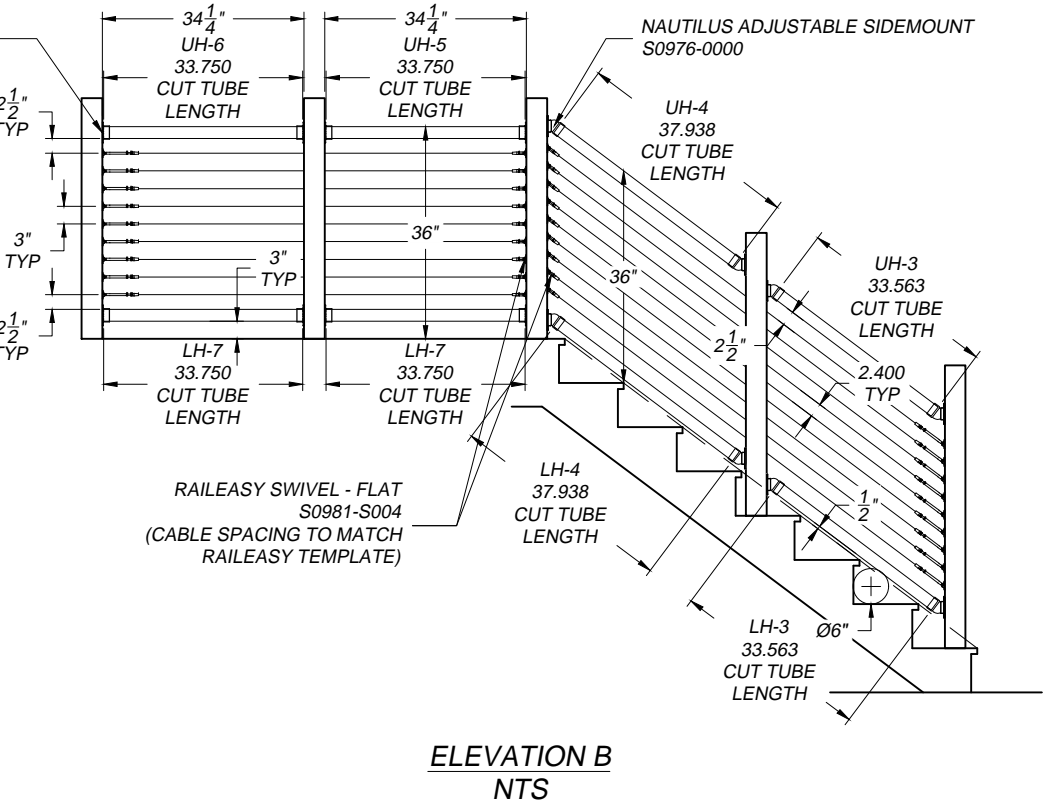
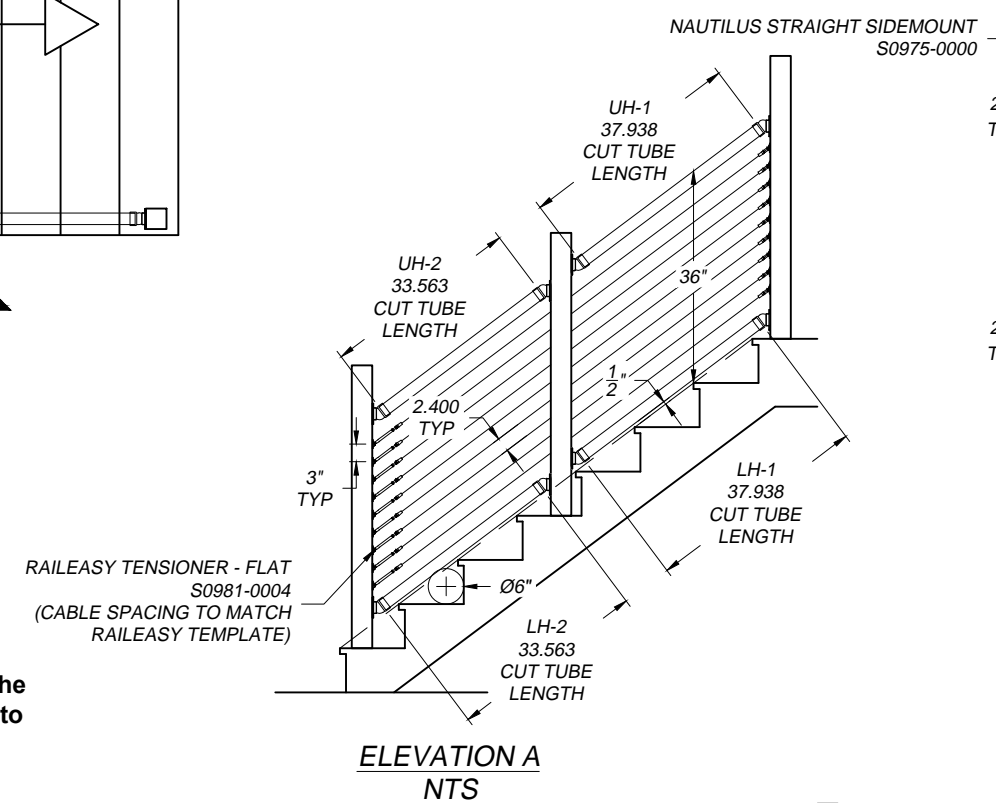


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUNCOR STAINLESS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF SUNCOR STAINLESS IS PROHIBITED.

PLEASE NOTE:
POSTS SHOWN AS MOUNTED ON WOOD.

- NOTES:
- HAND RAIL SYSTEM CONSISTING OF NAUTILUS II STYLE WITH HORIZONTAL WIRE ROPE.
 - DRAWING AND DIMENSIONS BASED UPON CUSTOMER SUPPLIED DRAWINGS.
 - ALL DIMENSIONS AND RAILING DETAILS ARE PENDING CUSTOMER APPROVAL.
 - 36" HAND RAIL SYSTEM CONSISTING OF 2" DIA ELECTRO-POLISHED 16 GAUGE 316 SS TUBING, CAST 316 SS FITTINGS, EPOXY CONNECTIONS AT JOINTS.
 - CUSTOMER TO CONFIRM DIMENSIONS FOR ACCURACY.
 - POSTS SHOWN AS MOUNTED ON WOOD.
 - CABLE IS SPACED AT 3" ON CENTER TO MATCH RAILEASY DRILLING TEMPLATE.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL DRAWING	XX/XX/XXXX	NMJ

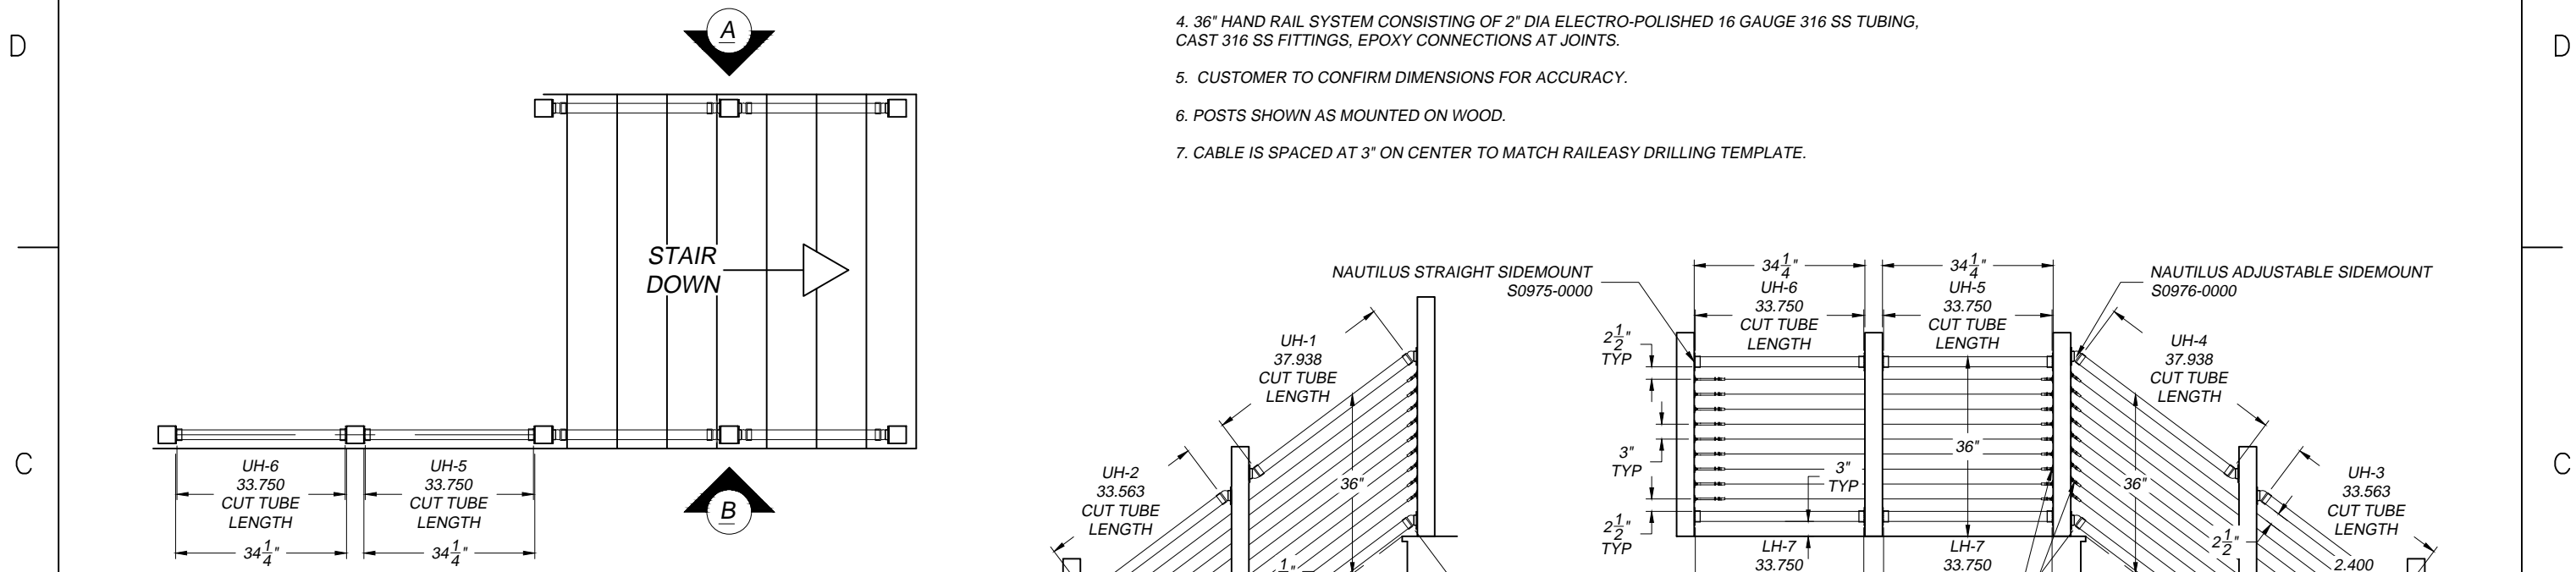


Deck or mounting area and stair dimensions MUST be confirmed by the customer and or contractor. It shall be the customer's responsibility to review the drawing(s) for accuracy.

Suncor/Atlantis Rail Systems will NOT be responsible for errors or misinterpretations of the railing system designed by us based upon customer confirmed dimensions.

Additional drawing time to change the design or correct for errors after signing will result in additional costs as well as any changes to parts made per the drawing.

Carefully review the drawing before signing and accepting. By signing and accepting the customer acknowledges the drawing and it's representation of the railing system, including but NOT limited to layout, dimensions, heights, NOTES and mounting, is accurate.

Post and Rail Mounting Surfaces: Atlantis Rail Systems provides a variety of mounting options for posts and rails used in our systems. Products of this nature require that mounting surfaces are constructed to be considered structural per building code definition for the surface material used. Structural integrity and building code compliance of mounting surfaces are the responsibility of the end user and / or installer. The use of any of our mounting methods are at the option and decision of the end user and / or installer and should be selected to match the structural material used to create the mounting surface.

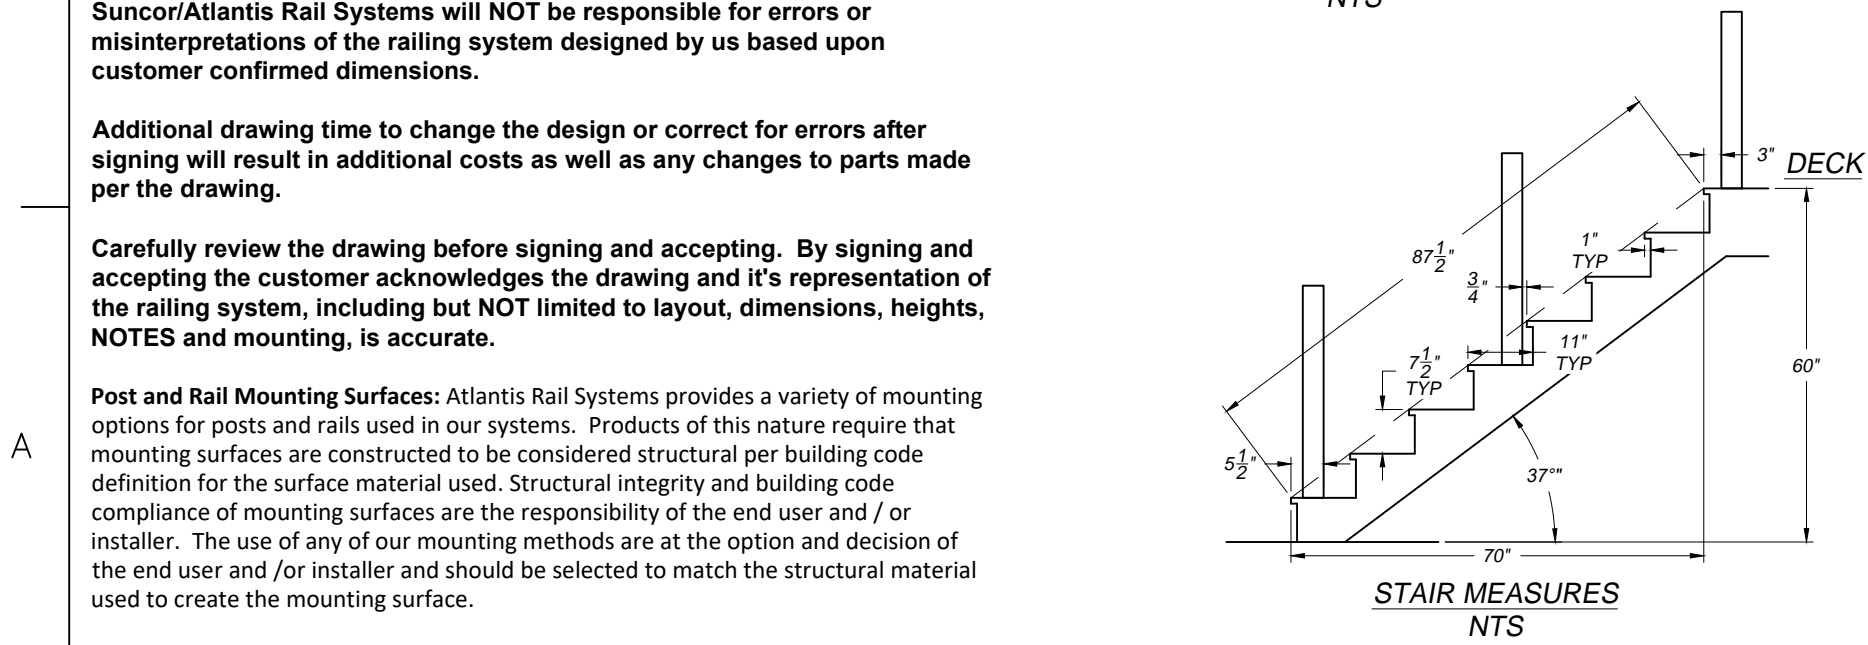

CUSTOMER SIGNATURE: _____ DATE: _____

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		CAD GENERATED DRAWING DO NOT MANUALLY UPDATE	
FRACTIONS	DECIMALS	ANGLES	
±1/64"	.X ±0.05	±1/2	
	.XX ±0.01		
	.XXX ±0.005		
MATERIAL		CHECKED	DATE
316SS		XXX	XX/XX/XXXX
FINISH		RESP ENG	
ELECTRO-POLISHED		MFG ENG	
		DUAL ENG	
SIZE	FSCM NO.	ORDER NO.	REV
D		XXXXXX-XX	A
SCALE NTS		CAD FILE: XXXXXXXXXXXXX	SHEET 1 OF 1



NAUTILUS II CABLE RAILING
SAMPLE DRAWING